

CONSTRUCTION ACCESSORIES

STUCANET **DATASHEET**





General description

Bekaert Stucanet® S E-BM is a purpose designed plaster and render carrier manufactured from a stainless steel welded wire mesh into which a moisture absorbent sheet of chip paper is interwoven. The chip paper assists with the wet adhesion and curing of the mortar and the perforations allow the mortar to perfectly bond around the steel wires, resulting in firm anchoring of the mortar and high resistance to load and impact.

Stucanet® S E-BM has two parallel, round fixing wires.


Stucanet® S E-BM is used specifically for exterior facade applications. It has the same wire structure as Stucanet® S, but is protected with a breather membrane to prevent moisture penetration whilst still allowing the wall to breathe naturally.

For further details, please contact us or ask for the Stucanet® application instructions.

Stucanet® S E-BM

Product Data Sheet

Panel elements

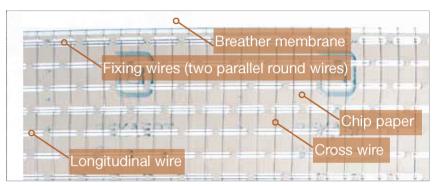

Dimensions and weights

Panel size (mesh, excluding breather membrane)			
Longitudinal	Transversal	Surface	Net usable panel surface after overlapping
mm	mm	m²/panel	m²/panel
2395	705	1.68	Approx. 1.56 m ²

Breather membrane			
Longitudinal	Transversal		
2350	725		

Size and number of meshes		
Longitudinal	Transversal	
38 x 50 mm		38 x 27 mm
63 pcs	13 pcs	2 pcs

Weight		
kg/panel	kg/m²	
2.03	1.20	

NV Bekaert SA Bekaertstraat 2 8550 Zwevegem Belgium T +32 56 76 72 92 F +32 56 76 72 90 buildingbenelux@bekaert.com www.bekaert.com/building



Technical specifications

Wire diameters		
Fixing wire	Longitudinal wire	Cross wire
	mm (diameter)	mm (diameter)
1.50 and 2.00	1.50	1.50

Stainless steel type		
Fixing wire	Longitudinal wire	Cross wire
gr/m²	gr/m²	gr/m²
Austhenitic stainless steel		

Tensile strength of wires		
Fixing wire	Longitudinal wire	Cross wire
> 350		

Packaging and packaging units

- Panels are packed in bundles of 15 pieces.
- The bundles are stacked on wooden pallets. For Stucanet® S E-BM, 25 bundles are stacked per pallet.
- Each bundle has a product label.

Panels per bundle	m²/bundle
15	25.3

Bundles per pallet	Panels per pallet	m²/pallet
25	375	633

Palet specifications		
We	ight	Dimensions
kg (net)	kg (gros)	
761	783	2.45 x 0.73 x 1.50

Certificates

CE, compliant with EN 13658 - 1 and 2: 2005.
 The document "EC Declaration of Conformity" is available upon request.





SDG

Get in touch

HEAD OFFICE

21 Tullygoonigan Industrial Estate Moy Road Armagh BT61 8DR

Tel: +44 (0) 28 3752 8999

sdgconstructiontechnology.com

MONAGHAN OFFICE

Cornacrieve Emyvale Monaghan HY18 XY 46

Tel: + 353 (47) 87 295

Email: sales@sdg.ie